Microbial and biochemical process characterization of a low-sludge age EBPR process for resource recovery

Valverde Pérez, Borja; Wágner, Dorottya Sarolta; Lóránt, Bálint ; Gülay, Arda; Radovici, Maria; Angelidaki, Irini; Smets, Barth F.; Plósz, Benedek G.

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

MEWE2016
Conference September 4th-7th 2016

Technical University of Denmark

Microbial and biochemical process characterization of a low-sludge age EBPR process for resource recovery

Borja Valverde-Pérez*, Dorottya S. Wágner, Bálint Lóránt, Arda Gülay, Maria Radovici, Irini Angelidaki, Barth F. Smets, Benedek Gy. Plósz*

**bvape@env.dtu.dk; beep@env.dtu.dk* Department of Environmental Engineering, Technical University of Denmark, Miljøvej, Building 113, 2800 Kgs. Lyngby, DENMARK

1. INTRODUCTION

Current research promotes resource recovery using different strategies:

- Energy recovery using A-stage systems [1]
- Phosphorus recovery using low-SRT EBPR systems [2,3]
- To minimize nitrification, thus producing ammonium rich medium for phototrophic organisms [2]
- Water reuse for "fertigation" [2,4]

Common element: short-SRT EBPR systems

Optimal N-to-P ratio

Fertigation

2. OBJECTIVES

- To **start-up** a **short-SRT EBPR** system and describe **process performance**
- To **define** the **microbial community**, affecting the performance of the short-SRT EBPR system
- To quantify **energy recovery**

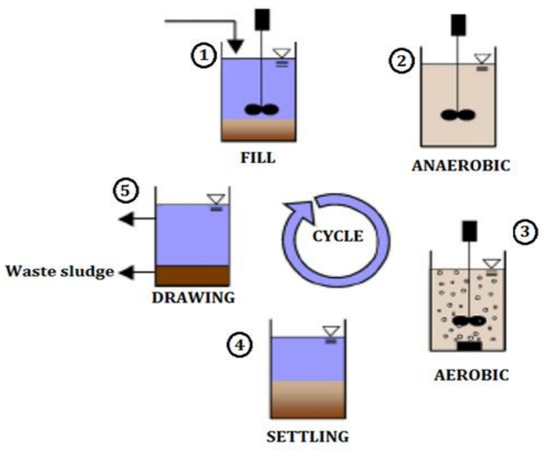

System: sequencing batch reactor fed with municipal wastewater

3. RESULTS

1. Process Performance:

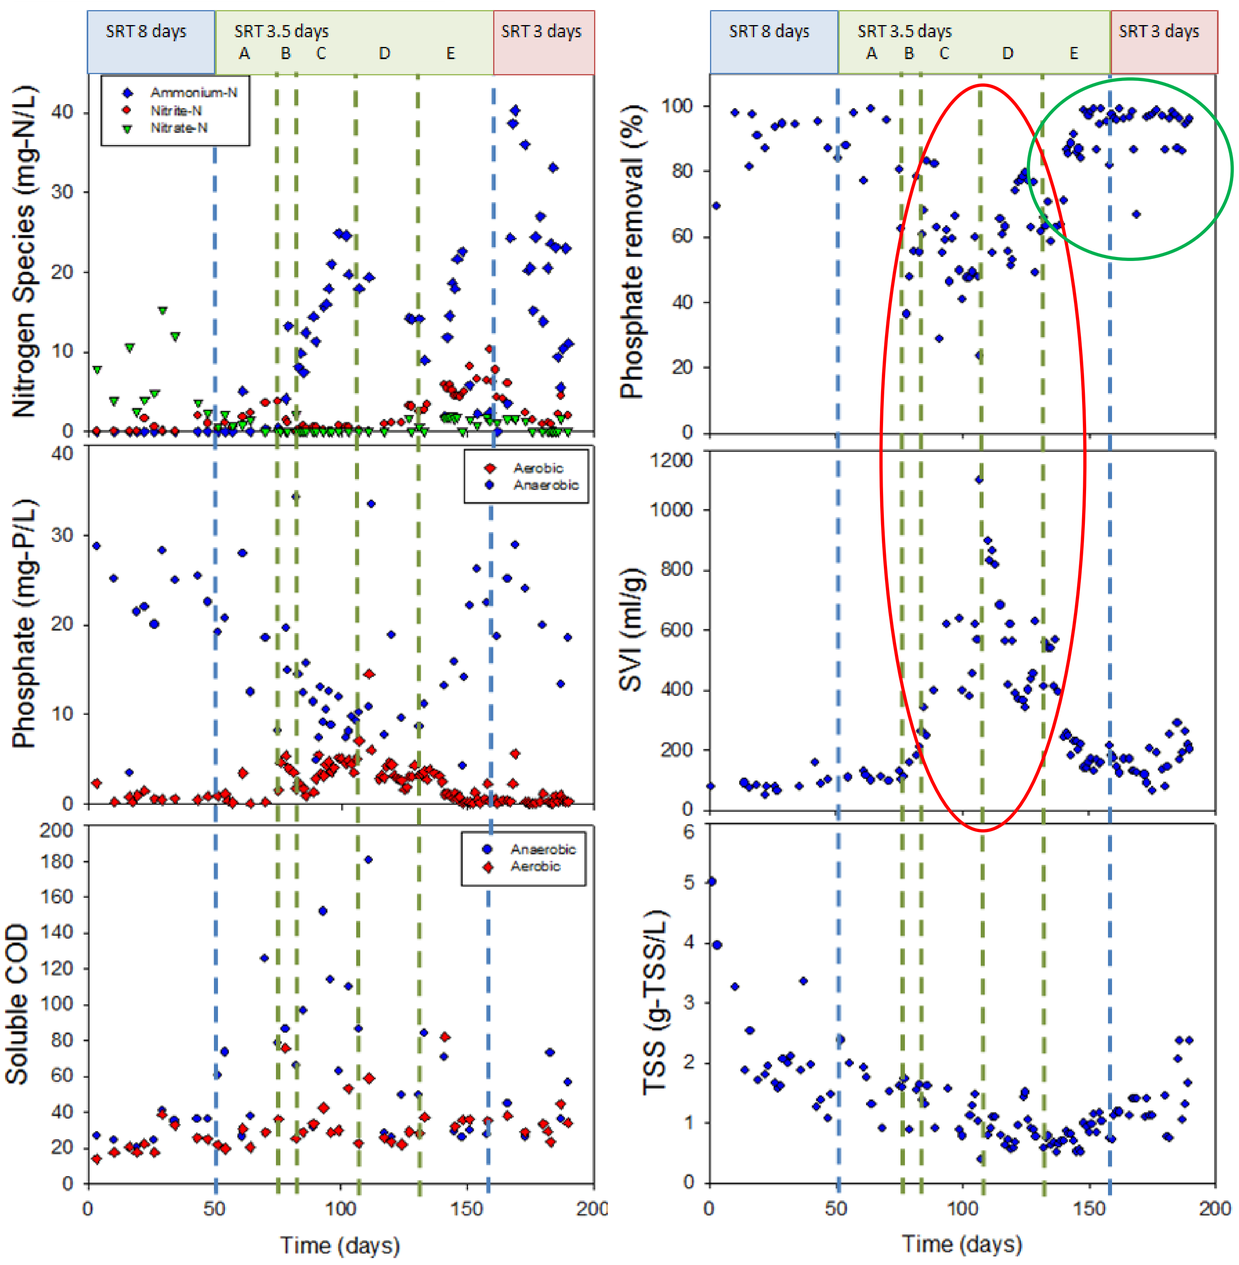

Figure 1: Reactor performance through 190 days a) Ammonia, nitrite and nitrate at the end of the aerobic phase and ammonia in the influent; b) phosphate at the end of the aerobic and anaerobic phases and influent; c) soluble COD at the end of the anaerobic and aerobic phases and total COD in the influent; d) phosphate removal; e) sludge volumetric index; f) total suspended solids. Phase A: from day 50 to day 78 – anaerobic SRT=1.2 d and aerobic SRT=1.75 d; phase B: from day 78 to 83 – anaerobic SRT=1.2 d and aerobic SRT=1.45 d; phase C: from day 83 to 109 – anaerobic SRT=1.2 d and aerobic SRT=1.75 d; phase D: from day 109 to day 132 – anaerobic SRT=0.88 d and aerobic SRT=1.75 d; phase E: from day 132 to day 156 – anaerobic SRT=0.68 d and aerobic SRT=1.75 d.

2. Microbial community:

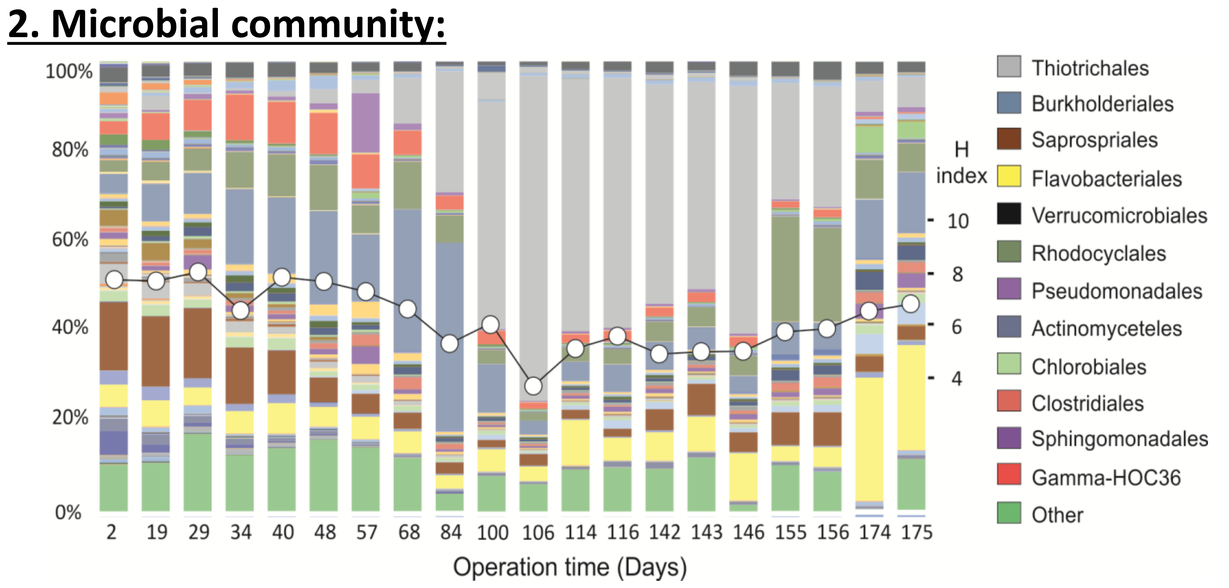

Figure 2: Order-level taxonomic classification of 16S rRNA amplicons at selected days of the reactor operation. Taxa abundance is expressed in percentage (left axis). Alpha-diversity at the order level measured as Shannon index (white dots, right axis).

3. Biomethane potential:

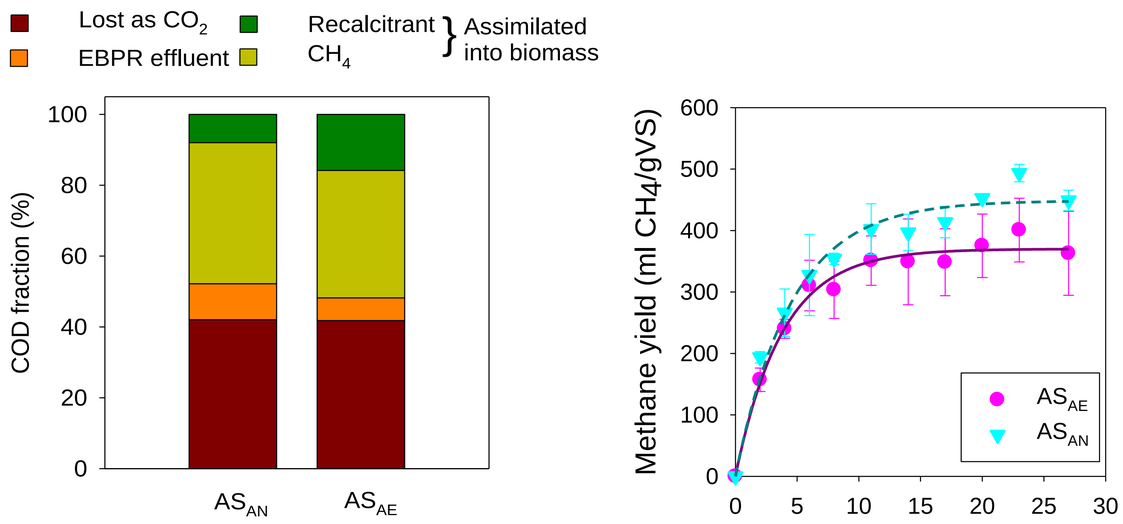

4. Highlights:

- EBPR effectively **removed phosphorus** at **SRT=3 d** and ***Accumulibacter phosphatis*** was the main PAO (based on qFISH)
- **Bulking** correlates with **poor phosphate removal** (highlighted in red, in Fig. 1)
  - **High abundance** of ***Thiothrix*** filamentous bacteria
  - **Sulfate reduction** during the anaerobic phase (about 30% of influent sulfate)
- **Sulfate reducers** outcompeted **PAO** by
  1. **Competing for influent COD**
  2. **Inhibiting phosphorus release**
- **Phosphate removal restored** by **reducing** the **anaerobic** phase length (highlighted in green in Fig. 1)
- Up to **40% of influent carbon** is **recovered** as methane at **SRT=3 d**

ACKNOWLEDGEMENT

The research was financially supported by the **Integrated Water Technology** (InWaTech) project, a collaboration between the Technical University of Denmark (DTU) and the Korea Advanced Institute of Science and Technology (KAIST).

References:

[1] Jimenez, J., Miller, M. , Bott, C., Murthy, S., De Clippeleir, H., and Wett, B., 2015. Water Research, 87, 476-482
[2] Valverde-Pérez, B., Ramin, E., Smets, B.F., and Plósz, B. Gy., 2015. Water Research, 68, 821-830
[3] Ge, H., Batstone, D.J., and Keller, J., 2015. Water Research, 68, 173-182
[4] Fang, L.L., Valverde-Pérez, B., Damgaard, A., Plósz, B.Gy., and Rygaard, M., 2015. Water Research, 88, 538-549